

Platform Stacker PS A SERIES

- ▲ **Simple and Easy Operation.**
Lifting movement via collapsible foot pedal.
Sensitive lowering through sinking valve.
Overload protection via pressure valve.
- ▲ **Safe Operation and secure Working Conditions.**
Stable chassis with 2 frame rollers and 2 steering rollers.
- ▲ **Long Service Life.**
Robust construction.
Hard chromium plated frame.
Hardened chromium plated ram.
- ▲ **Effortless Movement.**
Ball bearing rollers.
Polyurethane rollers.
- ▲ **Non-marking castor as standard.**
- ▲ **Conforms to EN 1757-1:2001.**




PS4150A



PS4120A
(with optional noise-free castor)

Noise-free Castor as option.

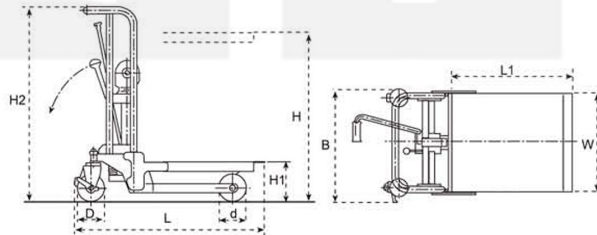

i-Lift No.	1510101	1510102	1510103	1510104	1510105
Model	PS2085A	PS2120A	PS4085A	PS4120A	PS4150A
Capacity (kg)	200			400	
Max. Platform Height H (mm)	970	1320	970	1320	1500
Min. Platform Height H1 (mm)		200		200	
Platform Length L1 (mm)		600		650	
Platform Width W (mm)		500		550	
Total Length L (mm)		940		1040	
Total Width B (mm)		560		590	
Total Height H2 (mm)	1080	1430	1090	1430	1610
Steering Rollers-diameter D (mm)		Φ125		Φ150	
Frame Rollers-diameter d (mm)		Φ125		Φ150	
Pump Strokes to Max. Height	14	21	30	45	58
Net Weight (kg)	53	58	72	78	83
Noise-free Castor	O	O	O	O	O

O = Option

"RCV HANDLING MACHINERY" :: HHF 037A, Industrial Estate, BBG 3000, HAL-FAR, Malta

Tel: +356 2148 5681 :: Fax: +356 2144 1747 :: Mob: +356 9905 4096

Vat Nr. MT1467-3111

email: info@rcvmalta.com :: Web: rcvmalta.com